



### Features

- Two and four wire models
- Photoelectric smoke sensing technology
- Uses smoke sensor in conjunction with a fixed temperature heat sensor to extend reliability
- Durable sensor head, no need for replacement
- N/C (normal close) or N/O (normal open) selectable relay output
- Easy installation and maintenance
- Attractive sleek housing
- UL listed

### Description

The SD Series photoelectric smoke detectors are engineered to meet strict UL fire safety codes and effectively respond to a wide spectrum of fires. The SD Series smoke detectors are suitable for use in commercial, industrial, institutional and residential occupancies. The sleek low-profile design of the detectors emphasizes ease of installation and field maintenance.

The SD Series consists of four models:

#### **SD-2WP / SD-2WT**


The SD-2WP is a two-wire photoelectric smoke detector for use with electrically compatible fire alarm control units. The SD-2WT is a two-wire smoke detector that uses photoelectric technology in conjunction with a fixed temperature heat sensor to further extend its sensing capabilities.

#### **SD-4WP / SD-4WT**

The SD-4WP is a four-wire photoelectric smoke detector. The SD-4WT is a four-wire photoelectric smoke detector with a fixed temperature heat sensor.

All SD Series smoke detectors come equipped with a sleek low-profile design and durable sensor head. Utilizing advanced detection and discrimination algorithms, the SD Series smoke detectors provide quality and reliability.

### Installation Diagram

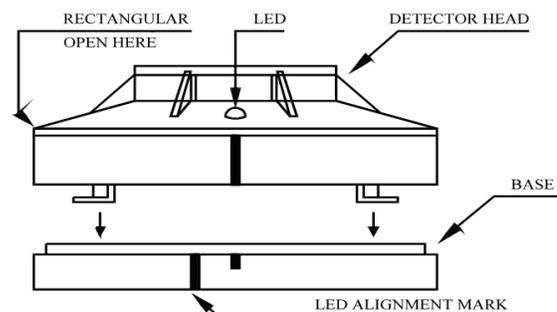

## Electrical Specifications

Model	2/4 wire	Heat Sensor	Voltage DC	Standby Current (Max.)	Alarm Current (Max.)	Surge Current (Max.)	Star-Up Time (Max.)	Permissible Current (Max.)	Frequency	Alarm contact
SD-4WT	4	135°F	12/24V	370µA	35mA		60 Seconds	80mA	3-5 Seconds	Form A
SD-4WP	4		12/24V	370µA	35mA		60 Seconds	80mA	3-5 Seconds	Form A
SD-2WT	2	135°F	12~28V	150µA	70mA	160µA	60 Seconds	80mA	3-5 Seconds	—
SD-2WP	2		12~28V	150µA	70mA	160µA	60 Seconds	80mA	3-5 Seconds	—

<b>Smoke Sensitivity</b>	2.66+/- 1.11% FT Obscuration (UL standard)
<b>Detection Range</b>	50 foot rating for heat sensor
<b>Start-Up Current</b>	70 µA Maximum
<b>Alarm Impedance</b>	For 2-wire models: 100Ω+3V max; 560Ω+3V max (red LED open circuit)
<b>Reset Voltage</b>	Less than 1 volt
<b>Reset Time</b>	Less than 1 sec
<b>Alarm Indicator</b>	Continuously emitting red light
<b>Temperature range</b>	-10°C to 50°C
<b>Humidity</b>	0 to 95% RH, non condensing
<b>Alarm Contact</b>	For 4-wire: N/O or N/C Operation Form A: 1.0A@30VDC/0.5A@125VAC
<b>Dimensions</b>	10mm (dia) x 46mm (ht) with base
<b>Weight</b>	130g/set with base

## Ordering Information

Model	Description
SD-2WP	2-wire photoelectric smoke detector c/w 4-inch base
SD-2WT	4-wire photoelectric smoke detector c/w 4-inch base
SD-4WP	2-wire photoelectric smoke detector with heat sensor c/w 4-inch base
SD-4WT	4-wire photoelectric smoke detector with heat sensor c/w 4-inch base

NOT TO BE USED FOR INSTALLATION PURPOSES.


**Mircom**<sup>TM</sup>  
 Canada  
 25 Interchange Way  
 Vaughan, Ontario L4K 5W3  
 Telephone: (905) 660-4655  
 Fax: (905) 660-4113

Web page: <http://www.mircom.com> Email: [mail@mircom.com](mailto:mail@mircom.com)

Distributed by:

ISO 9001:2000  
REGISTERED



CAT. 5177  
Rev. 0